

Cirrus

Linear Pendant

The Cirrus is a linear timber pendant that has been designed with a minimalist playful aesthetic. This pendant is a statement piece and can be customised in a variety of timbers and colours, featuring a solid metal trim.

Technical Details

Dimensions	80w x 50h
Material	Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting
Input Power	240V - 24VDC Transformer
CRI	90
Wattage	28.8W per metre
Lumens	1500lm per metre
Install	Installed with a remote driver. Must be installed by a licensed electrician
Dimming	Phase Cut (Universal Dimming) Other dimming types on request




Create a Custom Pendant

Pendant	Cirrus	CR
Timber	Victorian Ash Spotted Gum Tasmanian Blackwood White Oak Custom	VA SG TB WO C
Length	900mm 1200mm 1800mm 2000mm 2200mm 2500mm 2800mm 3000mm Custom	L90 L12 L18 L20 L22 L25 L28 L30 (_m)
Gripper Colour	White Black Solid Brass Solid Copper Stainless Steel Custom	1 2 3 4 5 6
End Cap Colour	White Black Solid Brass Solid Copper Stainless Steel Matching Timber	1 2 3 4 5 6
LED Colour Temperature	2700K Warm White 3000K Bright Warm White 4000K Cool White	27K 3K 4K
Dimming Type	Phase Cut DALI	PH DD
Ceiling Plate	Small Plate Ø76 Large Plate Ø106 Canopy Ø80	76 106 80
Ceiling Plate Colour	White Black	W B
Cable Colour	Silver Black White	SC BC WC
Drop Length	1.5m Standard Custom	1.5m _m


Timber




Dimensions

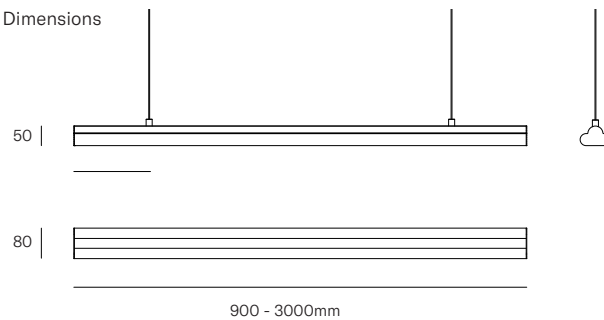

Ceiling Plate

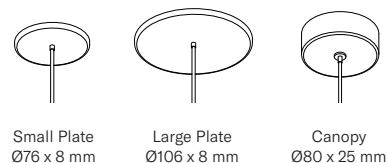


Ceiling Plate Details

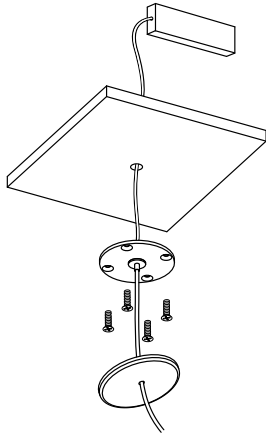

Ceiling Plate
Ø76 x 8mm

Suitable for full ceiling
access to place the remote
driver from above.


Cutout hole: 10-20mm

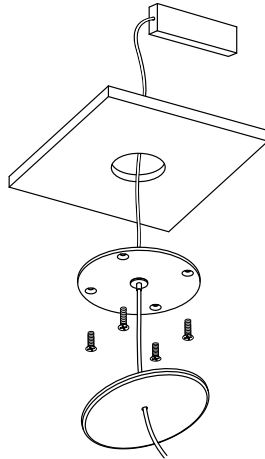

Ceiling Plate
Ø106 x 8mm

Suitable for limited ceiling
access to place the remote
driver from below.

Cutout hole: 60mm

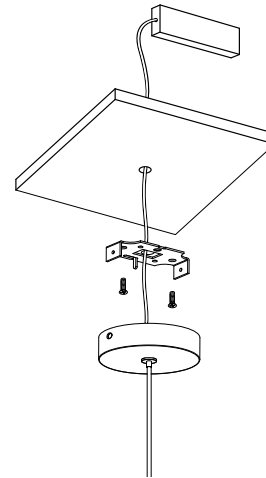

Canopy
Ø80 x 25mm

Suitable for full ceiling
access to place the remote
driver from above.

Cutout hole: 10-20mm